

EMC TEST REPORT

On Behalf of

Product Name: INTELLIGENT PULSE REPAIR

Trademark: N/A

Model Number: XJB1210-2

Prepared For: Tianchang Jinjie Electronics Co., Ltd

Address: Union village Qinlan Town Tianchang City Anhui Province

Prepared By: Shenzhen Huaxiang Testing Co., Ltd

Address: 1st Floor, Building A1, No. 2082 Jincheng Road, Shajing Street, Bao'an District, Shenzhen City, Guangdong Province, China

Report No.: HUAX250428081KR

TABLE OF CONTENT

Description

Test Report Description

Page

1. GENERAL INFORMATION	4
1.1. Description of Device (EUT)	5
1.2. Test Standards	5
1.3. Test Summary	6
1.4. Test Methodology	7
1.5. Test Facility	7
1.6. Measurement Uncertainty	7
2. MEASURING DEVICE AND TEST EQUIPMENT	8
2.1. For Power Line Conducted Emission	8
2.2. For Radiated Emission Measurement	8
2.3. For Harmonic Current / Flicker Measurement	8
2.4. For Electrostatic Discharge Immunity Test	8
2.5. For RF Strength Susceptibility Test	9
2.6. For Electrical Fast Transient /Burst Immunity Test	9
2.7. For Surge Immunity Test	9
2.8. For Injected Current Susceptibility Test	9
2.9. For Magnetic Field Immunity Test	9
2.10. For Voltage Dips and Interruptions Test	9
3. POWER LINE CONDUCTED EMISSION MEASUREMENT	10
3.1. Block Diagram of Test Setup	10
3.2. Measuring Standard	10
3.3. EUT Configuration on Measurement	10
3.4. Operating Condition of EUT	11
3.5. Test Procedure	11
3.6. Measuring Results	11
4. RADIATED EMISSION MEASUREMENT	14
4.1. Block Diagram of Test	14
4.2. Measuring Standard	14
4.3. Radiated Emission Limits	15
4.4. EUT Configuration on Test	15
4.5. Operating Condition of EUT	15
4.6. Test Procedure	15
4.7. Measuring Results	15
5. HARMONIC CURRENT EMISSION MEASUREMENT	18
5.1 Block Diagram of Test Setup	18
5.2 Measuring Standard	18
5.3 Operation Condition of EUT	18
5.4 Measuring Results	18
6. VOLTAGE FLUCTUATION AND FLICKER MEASUREMENT	19
6.1 Block Diagram of Test Setup	19
6.2 Measuring Standard	19
6.3 Operation Condition of EUT	19
6.4 Measuring Results	19
7. ELECTROSTATIC DISCHARGE IMMUNITY TEST	21
7.1 Block Diagram of Test Setup	21
7.2 Test Standard	21
7.3 Severity Levels and Performance Criterion	21
7.4 EUT Configuration	21

7.5 Operating Condition of EUT	22
7.6 Test Procedure	22
7.7 Test Results	22
8. RF FIELD STRENGTH SUSCEPTIBILITY TEST	24
8.1 Block Diagram of Test	24
8.2 Test Standard	24
8.3 Severity Levels and Performance Criterion	25
8.4 EUT Configuration on Test	25
8.5 Operating Condition of EUT	25
8.6 Test Procedure	25
8.7 Test Results	25
9. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST	27
9.1 Block Diagram of Test Setup	27
9.2 Test Standard	27
9.3 Severity Levels and Performance Criterion	27
9.4 EUT Configuration	27
9.5 Operating Condition of EUT	28
9.6 Test Procedure	28
9.7 Test Result	28
10. SURGE IMMUNITY TEST	30
10.1 Block Diagram of Test Setup	30
10.2 Test Standard	30
10.3 Severity Levels and Performance Criterion	30
10.4 EUT Configuration	31
10.5 Operating Condition of EUT	31
10.6 Test Procedure	31
10.7 Test Result	31
11. INJECTED CURRENTS SUSCEPTIBILITY TEST	33
11.1 Block Diagram of Test Setup	33
11.2 Test Standard	33
11.3 Severity Levels and Performance Criterion	33
11.4 EUT Configuration	34
11.5 Operating Condition of EUT	34
11.6 Test Procedure	34
12. MAGNETIC FIELD SUSCEPTIBILITY TEST	36
12.1 Block Diagram of Test	36
12.2 Test Standard	36
12.3 Severity Levels and Performance Criterion	36
12.4 EUT Configuration on Test	37
12.5 Test Procedure	37
12.6 Test Results	37
13. VOLTAGE DIPS AND INTERRUPTIONS TEST	39
13.1 Block Diagram of Test Setup	39
13.2 Test Standard	39
13.3 Severity Levels and Performance Criterion	40
13.4 EUT Configuration	40
13.5 Operating Condition of EUT	40
13.6 Test Procedure	40
13.7 Test Result	40
Photos of EUT	

TEST REPORT DECLARATION

Applicant	:	Tianchang Jinjie Electronics Co., Ltd
Address :	:	Union village Qinlan Town Tianchang City Anhui Province
Manufacturer:	:	Tianchang Jinjie Electronics Co., Ltd
Address :	:	Union village Qinlan Town Tianchang City Anhui Province
EUT Description :	:	INTELLIGENT PULSE REPAIR
Model Number	:	XJB1210-2
Test Date	:	Apr. 24, 2025 - Apr. 28, 2025
Date of Report	:	Apr. 28, 2025

Test Standards:

EN 55032: 2015 + A1: 2020
EN 55035: 2017 + A1: 2020
EN IEC 61000-3-2: 2019+A2:2024
EN 61000-3-3: 2013+A2:2021

The EUT described above is tested by Huaxiang Testing Technology Co , Ltd. EMC Laboratory to determine the maximum emissions from the EUT and ensure the EUT to be compliance with the immunity requirements of the EUT. Shenzhen Huaxiang Testing Co., Ltd. is assumed full responsibility for the accuracy of the test results. Also, this report shows that the EUT technically complies with the 2014/30/EU directive and its amendment requirements.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Joan Wang

Prepared by(Test Engineer):

Amy Jiang

Approved(Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: INTELLIGENT PULSE REPAIR
Trademark	: N/A
Model	: XJB1210-2
Test Voltage	: AC 110-240V 50/60Hz
Rating	: Input Voltage:AC110-240V, 50-60Hz Output Voltage:12V-15.5V Output Current:DC 10A(4-180Ah)
Applicant	: Tianchang Jinjie Electronics Co., Ltd
Address	: Union village Qinlan Town Tianchang City Anhui Province
Manufacturer	: Tianchang Jinjie Electronics Co., Ltd
Address	: Union village Qinlan Town Tianchang City Anhui Province

1.2. Test Standards

Test Standards	
EN 55032: 2015 + A1: 2020	Information technology equipment- Radio disturbance characteristics- Limits and methods of measurement
EN 55035: 2017 + A1: 2020	Information technology equipment- Immunity characteristics - Limits and methods of measurement
EN IEC 61000-3-2: 2019+A2:2024	Electromagnetic compatibility(EMC)-Part 3-2:Limits-Limits for harmonic current emissions(equipment input current $\leq$ XJB1210-2 per phase)
EN 61000-3-3: 2013+A2:2021	Electromagnetic compatibility(EMC)-Part 3-3:Limits-Limitation of voltage changes, Voltage fluctuations and flicker in public low-voltage supply systems. For equipment with Rated current $\leq$ XJB1210-2 per phase and not subject to conditional connection

1.3. Test Summary

For the EUT described above.

Table 1: Tests Carried Out Under EN 55032: 2015 + A1: 2020

Standard	Test Items	Status
EN 55032: 2015 + A1: 2020	Disturbance Voltage at The Mains Terminals (150KHz To 30MHz)	√
	Radiated Disturbances (30MHz To 1000MHz)	√

√ Indicates that the test is applicable

× Indicates that the test is not applicable

Table 2: Tests Carried Out Under

Standard	Test Items	Status
EN61000-4-2:2009	Electrostatic discharge Immunity	√
EN61000-4-3:2006	Radiated Susceptibility (80MHz to 1GHz)	√
EN61000-4-4:2004+A1:2010	Electrostatic Fast Transient/Burst Immunity	√
EN61000-4-5:2006	Surge Immunity	√
EN61000-4-6:2009	Conducted Susceptibility (150KHz to 80MHz)	√
EN61000-4-8:2010	Power Frequency Magnetic Field Immunity (50/60Hz)	√
EN61000-4-11:2004	Voltage Dips Short Interruptions Immunity Tests	√

√ Indicates that the test is applicable

× Indicates that the test is not applicable

Table 3: Tests Carried Out Under EN IEC 61000-3-2: 2019+A2:2024 & EN61000-3-3:2013

Standard	Test Items	Status
EN IEC 61000-3-2: 2019+A2:2024	Harmonic Current	×
EN61000-3-3:2013	Voltage Fluctuations	√

√ Indicates that the test is applicable

× Indicates that the test is not applicable

1.4. Test Methodology

All measurements contained in this report were conducted with CISPR 16-1: 2002, radio disturbance and immunity measuring apparatus, and CISPR16-2: 2002, Method of measurement of disturbances and immunity.

All measurement required was performed at laboratory of Shenzhen Huaxiang Testing Co., Ltd,

1.5. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

The facility also complies with the radiated and AC line conducted test site criteria set forth in CISPR 16-1: 2002, CISPR16-2: 2002.

1.6.Measurement Uncertainty

Radiation Uncertainty : $U_r = \pm 3.84 \text{ dB}$

Conduction Uncertainty : $U_c = \pm 2.72 \text{ dB}$

2. MEASURING DEVICE AND TEST EQUIPMENT

2.1. For Power Line Conducted Emission

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCS30	828985/018	Nov. 20, 2024	1 Year
2.	L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	Nov. 20, 2024	1 Year
3.	50Ω Coaxial Switch	Anritsu	MP59B	M20531	N/A	N/A
4.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	Nov. 20, 2024	1 Year
5.	Voltage Probe	Rohde & Schwarz	TK9416	N/A	Nov. 20, 2024	1 Year

2.2. For Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	ANRITSU	MS2661C	6200140915	Nov. 20, 2024	1 Year
2.	Test Receiver	Rohde & Schwarz	ESCS30	828985/018	Nov. 20, 2024	1 Year
3.	Bilog Antenna	Schwarzbeck	VULB9163	142	Nov. 20, 2024	1 Year
4.	50 Coaxial Switch	Anritsu Corp	MP59B	6100237248	Nov. 20, 2024	1 Year
5.	EMI Power Line Filter	DUOJI EME	FNF 201 B16	N/A	Nov. 20, 2024	1 Year
6.	EMI Power Line Filter	JIANLI	DL-40C	N/A	Nov. 20, 2024	1 Year
7.	Cable	Schwarzbeck	AK9513	ACRX1	Nov. 20, 2024	1 Year
8.	Cable	Rosenberger	N/A	FP2RX2	Nov. 20, 2024	1 Year
9.	Cable	Schwarzbeck	AK9513	CRPX1	Nov. 20, 2024	1 Year
10.	Cable	Schwarzbeck	AK9513	CRRX2	Nov. 20, 2024	1 Year
11.	Signal Generator	HP	8648A	3625U00573	Nov. 20, 2024	1 Year

2.3. For Harmonic Current / Flicker Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Power Frequency Test System	HAEFELY	PHF555	080419-03	Nov. 20, 2024	1 Year
2.	PC	N/A	P2L97	N/A	Nov. 20, 2024	N/A

2.4. For Electrostatic Discharge Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Tester	HAEFELY	PESD1600	H708159	Nov. 20, 2024	1 Year

2.5. For RF Strength Susceptibility Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Signal Generator	HP	8648A	3625U00573	Nov. 20, 2024	1 Year
2.	Amplifier	AR	500A100	17034	NCR	NCR
3.	Amplifier	AR	XJB1210-2/10 00M1	17028	NCR	NCR
4.	Isotropic Field Monitor	AR	FM2000	16829	NCR	NCR
5.	Isotropic Field Probe	AR	FP2000	16755	Nov. 20, 2024	1 Year
6.	Biconic Antenna	EMCO	3108	9507-2534	NCR	NCR
7.	Log-periodic Antenna	AR	AT1080	16812	NCR	NCR
8.	PC	N/A	486DX2	N/A	N/A	N/A

2.6. For Electrical Fast Transient /Burst Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Burst Tester	HAEFELY	PEFT4010	080981-16	Nov. 20, 2024	1 Year
2.	Coupling Clamp	HAEFELY	IP-4A	147147	Nov. 20, 2024	1 Year

2.7. For Surge Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Surge Tester	HAEFELY	PSURGE4.1	080107-04	Nov. 20, 2024	1 Year

2.8. For Injected Current Susceptibility Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Simulator	EMTEST	CWS500C	0900-12	Nov. 20, 2024	1 Year
2.	CDN	EMTEST	CDN-M2	5100100100	Nov. 20, 2024	1 Year
3.	CDN	EMTEST	CDN-M3	0900-11	Nov. 20, 2024	1 Year
4.	Injection Clamp	EMTEST	F-2031-23 MM	368	Nov. 20, 2024	1 Year
5.	Attenuator	EMTEST	ATT6	0010221.3A max	Nov. 20, 2024	1 Year

2.9. For Magnetic Field Immunity Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Magnetic Field Tester	HAEFELY	MAG100	250040.1	Nov. 20, 2024	1 Year

2.10. For Voltage Dips and Interruptions Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Dips Tester	HAEFELY	Pline1610	083732-12	Nov. 20, 2024	1 Year

3. POWER LINE CONDUCTED EMISSION MEASUREMENT

3.1. Block Diagram of Test Setup

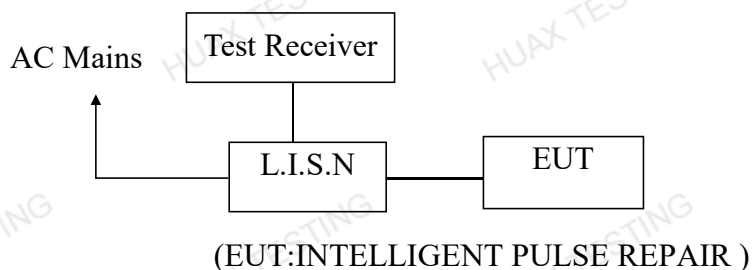

3.2. Measuring Standard

EN 55032: 2015 + A1: 2020

Power Line Conducted Emission Limits (Class B)

Frequency (MHz)	Limit (dB μ V)	
	Quasi-Peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0
NOTE1-The lower limit shall apply at the transition frequencies. NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.		

3.3. EUT Configuration on Measurement

The following equipments are installed on Conducted Emission Measurement to meet EN55032 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

EUT : INTELLIGENT PULSE REPAIR
Model Number : XJB1210-2

3.4. Operating Condition of EUT

3.4.1. Setup the EUT as shown on Section 3.1.

3.4.2. Turn on the power of all equipments.

3.4.3. Let the EUT work in measuring mode (On) and measure it.

3.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network (L.I.S.N). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are investigated to find out the maximum conducted emission according to the EN55032 regulations during conducted emission measurement.

The bandwidth of the field strength meter (R&S Test Receiver ESCS30) is set at 9KHz in 150KHz~30MHz and 200Hz in 9KHz~150KHz.

The frequency range from 150kHz to 30MHz is investigated

3.6 Measuring Results

PASS


Please reference to the following pages

Conducted Emission

EUT : INTELLIGENT PULSE REPAIR Date : 2025-04-24

Model : XJB1210-2 Power Supply : AC 110-240V, 50/60Hz

Mode : Normal Working Phase : L-line

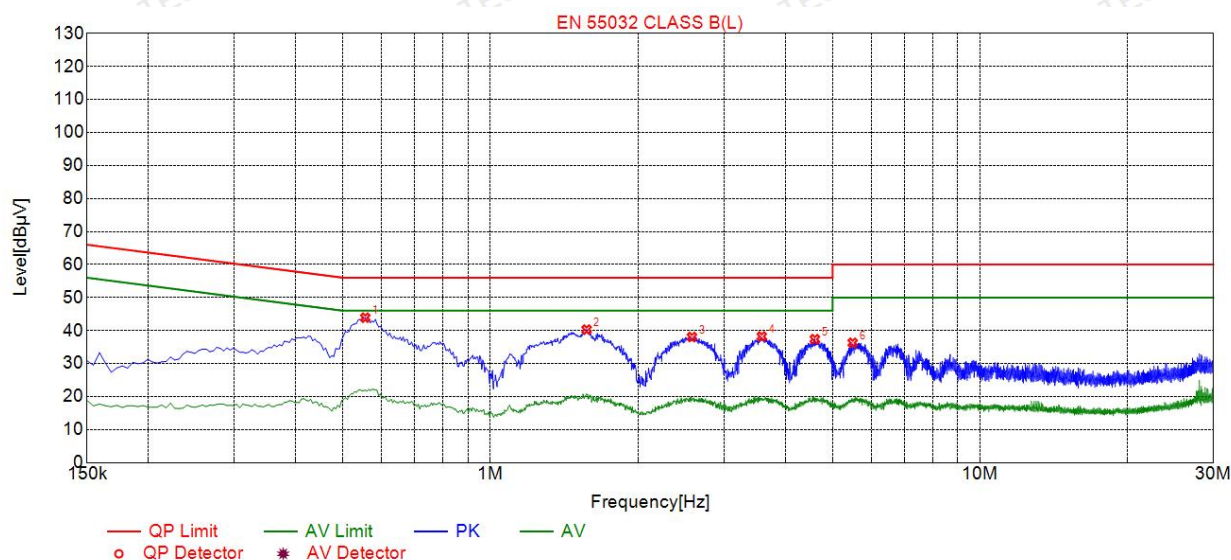

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.5550	43.90	19.86	56.00	12.10	24.04	PK	L
2	1.5720	40.30	19.93	56.00	15.70	20.37	PK	L
3	2.5800	38.05	20.03	56.00	17.95	18.02	PK	L
4	3.5835	38.22	20.09	56.00	17.78	18.13	PK	L
5	4.6005	37.40	20.10	56.00	18.60	17.30	PK	L
6	5.4960	36.30	20.11	60.00	23.70	16.19	PK	L

Conducted Emission

EUT : INTELLIGENT PULSE REPAIR


Date : 2025-04-24

Model : XJB1210-2

Power Supply : AC 110-240V, 50/60Hz

Mode : Normal Working

Phase : N-line

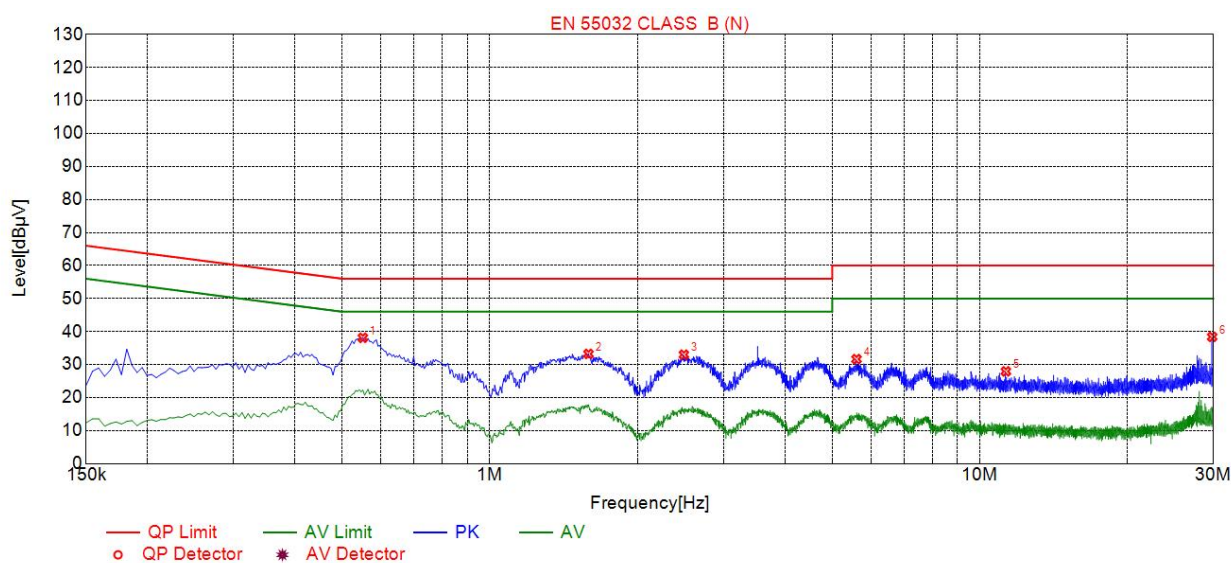


Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.5505	38.10	19.75	56.00	17.90	18.35	PK	N
2	1.5900	33.23	19.80	56.00	22.77	13.43	PK	N
3	2.4900	32.99	19.89	56.00	23.01	13.10	PK	N
4	5.6040	31.65	20.00	60.00	28.35	11.65	PK	N
5	11.3100	27.94	19.82	60.00	32.06	8.12	PK	N
6	29.8275	38.40	20.37	60.00	21.60	18.03	PK	N

4. RADIATED EMISSION MEASUREMENT

4.1. Block Diagram of Test

4.1.1. Block diagram of test setup (In chamber)

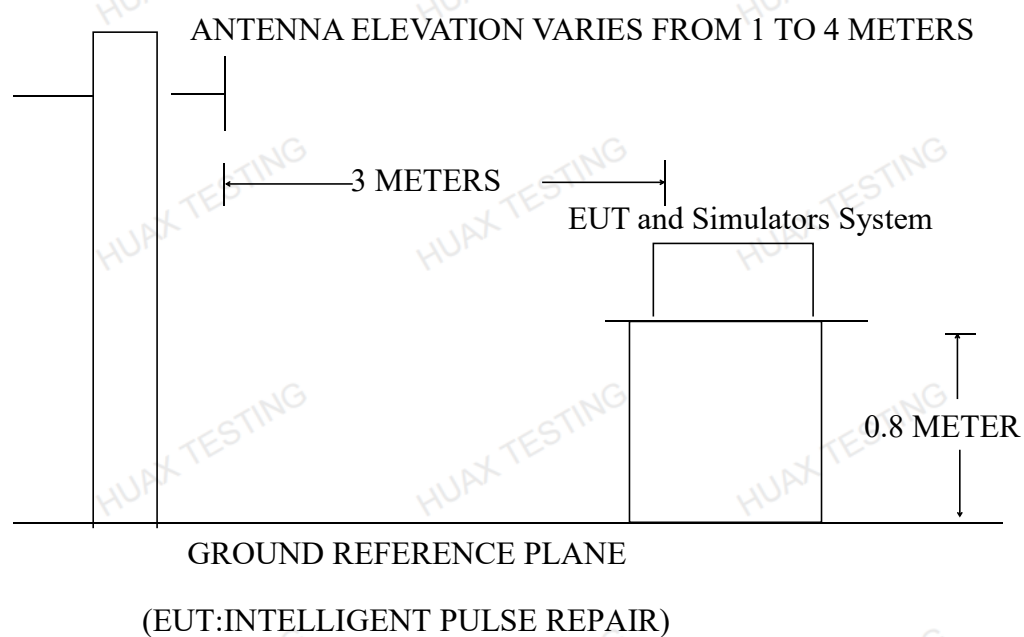

4.2. Measuring Standard

EN 55032: 2015 + A1: 2020

4.3. Radiated Emission Limits

All emanations from a class B device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMIT (dB μ V/m)
30 ~ 230	3	40
230 ~ 1000	3	47

Note: (1) The smaller limit shall apply at the combination point between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.

4.4. EUT Configuration on Test

The EN55032 regulations test method must be used to find the maximum emission during radiated emission measurement.

4.5. Operating Condition of EUT

4.5.1. Turn on the power.

4.5.2. After that, let the EUT work in test mode (Normal) and measure it.

4.6. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Bilog antenna (calibrated by Dipole Antenna) is used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the Receiver (ESCS30) is set at 120kHz.

The frequency range from 30MHz to 1000MHz is investigated.

4.7. Measuring Results


PASS.

Please reference to the following pages

Radiated Emission Test Data

Standard: EN55032 Class B RE
Test item: Radiation Test
EUT: INTELLIGENT PULSE
REPAIR
Model: XJB1210-2
Note:

Polarization: Vertical
Date: 2025-04-24
Test By: Mark
Distance: 3m

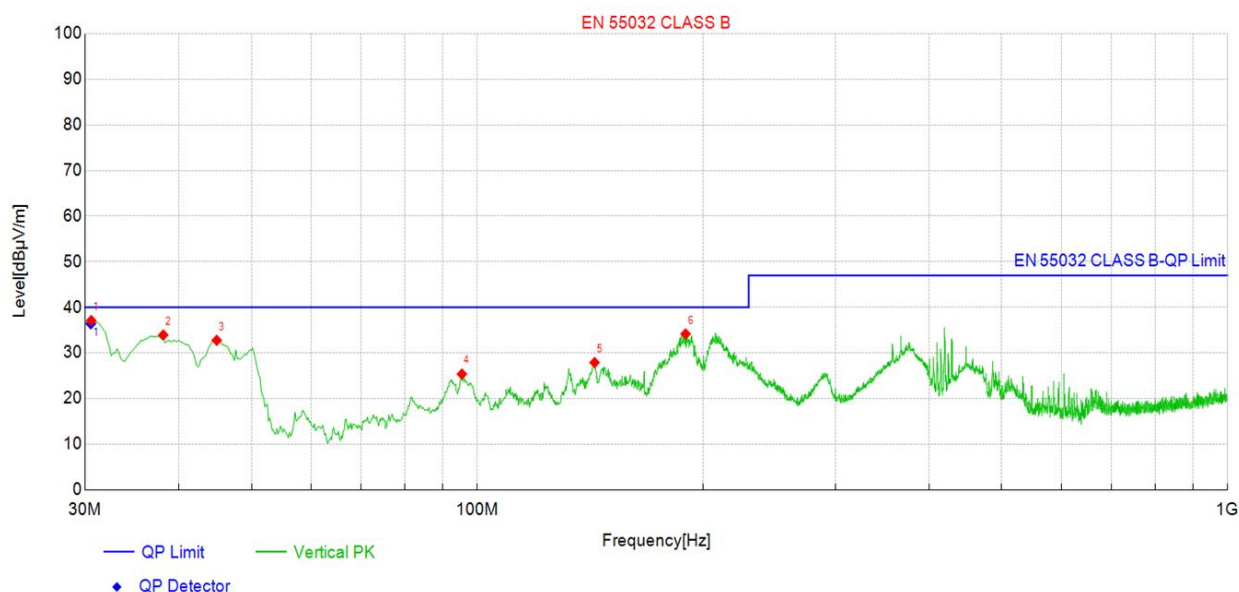

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	30.58	48.8	37.11	-11.68	40.00	2.89	100	151	PK	Vert	PASS
2	38.15	49.5	33.94	-15.57	40.00	6.06	100	303	PK	Vert	PASS
3	44.94	49.4	32.77	-16.59	40.00	7.23	100	154	PK	Vert	PASS
4	95.39	45.5	25.37	-20.11	40.00	14.63	100	163	PK	Vert	PASS
5	143.32	44.3	27.90	-16.40	40.00	12.10	100	96	PK	Vert	PASS
6	189.50	53.2	34.18	-18.98	40.00	5.82	100	172	PK	Vert	PASS

Final Data List

NO.	Frequency [MHz]	Factor [dB/m]	QP Reading [dBμV]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pol	Verdict
1	30.54	-11.68	48.07	36.39	40.00	3.61	100	151	Ver	PASS

Radiated Emission Test Data

Standard: EN55032 Class B RE Polarization: Horizontal
Test item: Radiation Test Date: 2025-04-24
EUT: INTELLIGENT PULSE Test By: Mark
Model: XJB1210-2 Distance: 3m
Note:

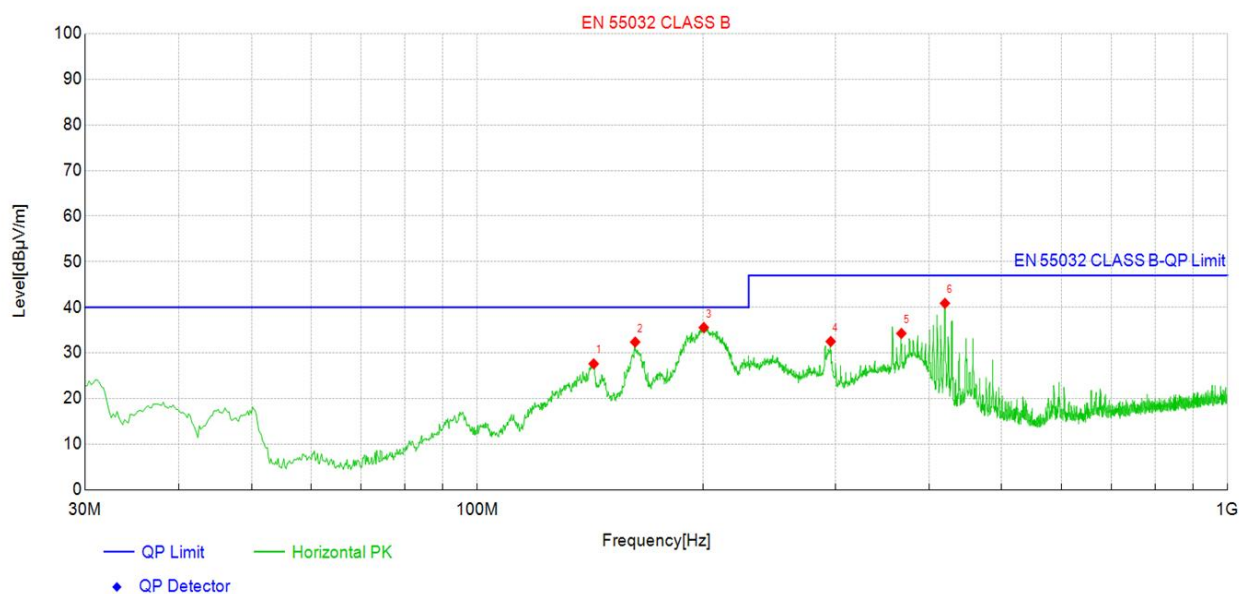


Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	142.93	44.1	27.61	-16.44	40.00	12.39	100	199	PK	Hori	PASS
2	162.33	48.5	32.38	-16.07	40.00	7.62	100	240	PK	Hori	PASS
3	200.37	55.0	35.58	-19.44	40.00	4.42	100	108	PK	Hori	PASS
4	295.83	48.6	32.50	-16.10	47.00	14.50	100	117	PK	Hori	PASS
5	367.43	48.6	34.27	-14.30	47.00	12.73	100	95	PK	Hori	PASS
6	420.02	53.9	40.89	-13.05	47.00	6.11	100	168	PK	Hori	PASS

5. HARMONIC CURRENT EMISSION MEASUREMENT

5.1 Block Diagram of Test Setup

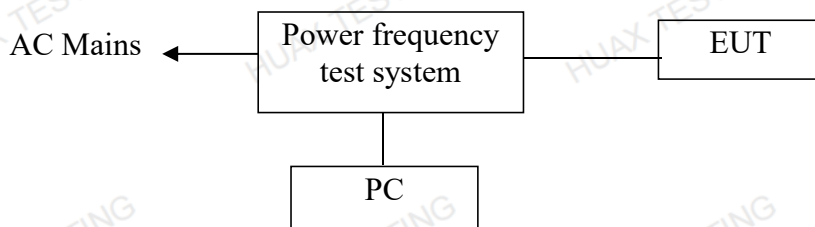

(EUT: INTELLIGENT PULSE REPAIR)

5.2 Measuring Standard

EN 61000-3-2: 2014

5.3 Operation Condition of EUT


Same as Section 3.4, except the test setup replaced as Section 5.1.

5.4 Measuring Results

N/A (Below 75W)

6.VOLTAGE FLUCTUATION AND FLICKER EASUREMENT

6.1Block Diagram of Test Setup

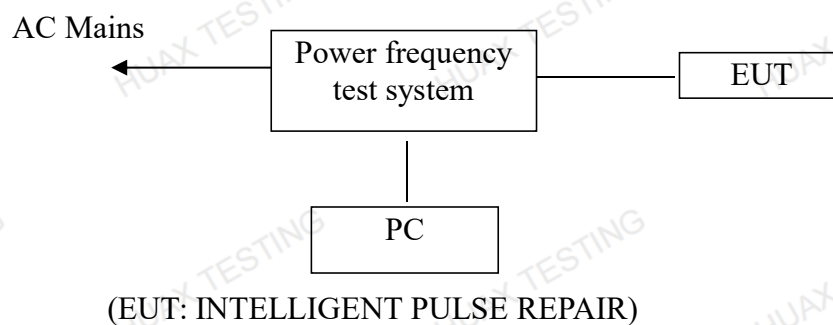

6.2Measuring Standard

EN61000-3-3:2013

6.3 Operation Condition of EUT

6.3.1 Setup the EUT and simulators as shown in Section6.1.

6.3.2 Turn on the power of all equipments.

6.3.3 Let the EUT work in test modes (Normal) and test it.

6.4 Measuring Results

PASS

Please reference to the following page

EN 61000-3-3 TEST REPORT 2025-04-24 16:23

Unit: INTELLIGENT PULSE REPAIR M/N: XJB1210-2
Test mode: Normal Working
Manuf: Tianchang Jinjie Electronics Co., Ltd
Operator: Mark

TEST SETUP

Test Freq.: 50.00 Hz. Test Voltage: 230.0 vac
Waveform: SINE
Test Time: 120.0 min. Tshort: 10.0 min.
Prog. Zo Enabled: YES Prog. Zo: 0.000
Voltage Change less than once per Hour: NO
Impedance selected: IEC-725 STD. REF.
Synthetic R+L Enabled: NO
Resistance: 0.380 Ohms Inductance: 460.000 uH

TEST DATA

Result:	PASS	EUT Data	Limit	Result	Test Enabled
Pst max	0.189	1.00	PASS	true	
Plt max	0.166	0.65	PASS	true	
dc %	0.00	3.00	PASS	true	
dmax %	1.32	4.00	PASS	true	
d(t) sec.	0.00	0.20	PASS	true	
Power Source Data					
Source Pst max	0.231	0.400	PASS	true	
% THD	0.03	3.00	PASS	true	


7. ELECTROSTATIC DISCHARGE IMMUNITY TEST

7.1 Block Diagram of Test Setup

7.1.1 Block Diagram of the EUT and the simulators



7.1.2 Block diagram of ESD test setup

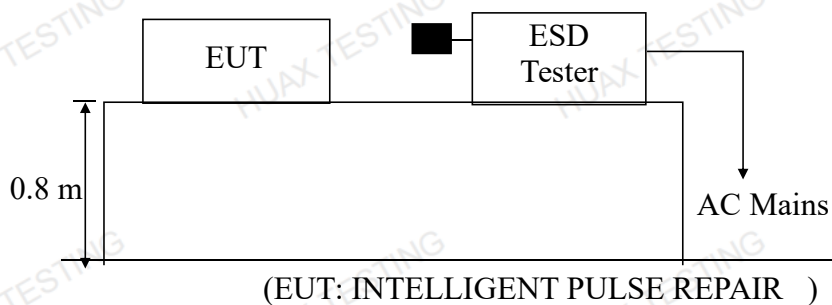

7.2 Test Standard

(EN61000-4-2: 2009)

Severity Level: 3 / Air Discharge: $\pm 8\text{KV}$ Level: 2 / Contact Discharge: $\pm 4\text{KV}$

7.3 Severity Levels and Performance Criterion

7.3.1 Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.	± 2	± 2
2.	± 4	± 4
3.	± 6	± 8
4.	± 8	± 15
X	Special	Special

7.3.2 Performance criterion: **B**

7.4 EUT Configuration

The configuration of EUT is listed in Section 3.3.

7.5 Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 3.4. Except the test set up replaced by Section 7.1.

7.6 Test Procedure

7.6.1 Air Discharge:

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

7.6.2 Contact Discharge:

All the procedure shall be same as Section 7.6.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

7.6.3 Indirect discharge for horizontal coupling plane

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

7.6.4 Indirect discharge for vertical coupling plane

At least 10 single discharge (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

7.7 Test Results

PASS


Please refer to the following page

Page 23 of 47


8. RF FIELD STRENGTH SUSCEPTIBILITY TEST

8.1 Block Diagram of Test

8.1.1 Block diagram of connection between the EUT and Load

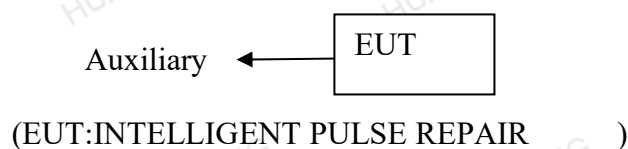

8.1.2 Block diagram of RS test setup

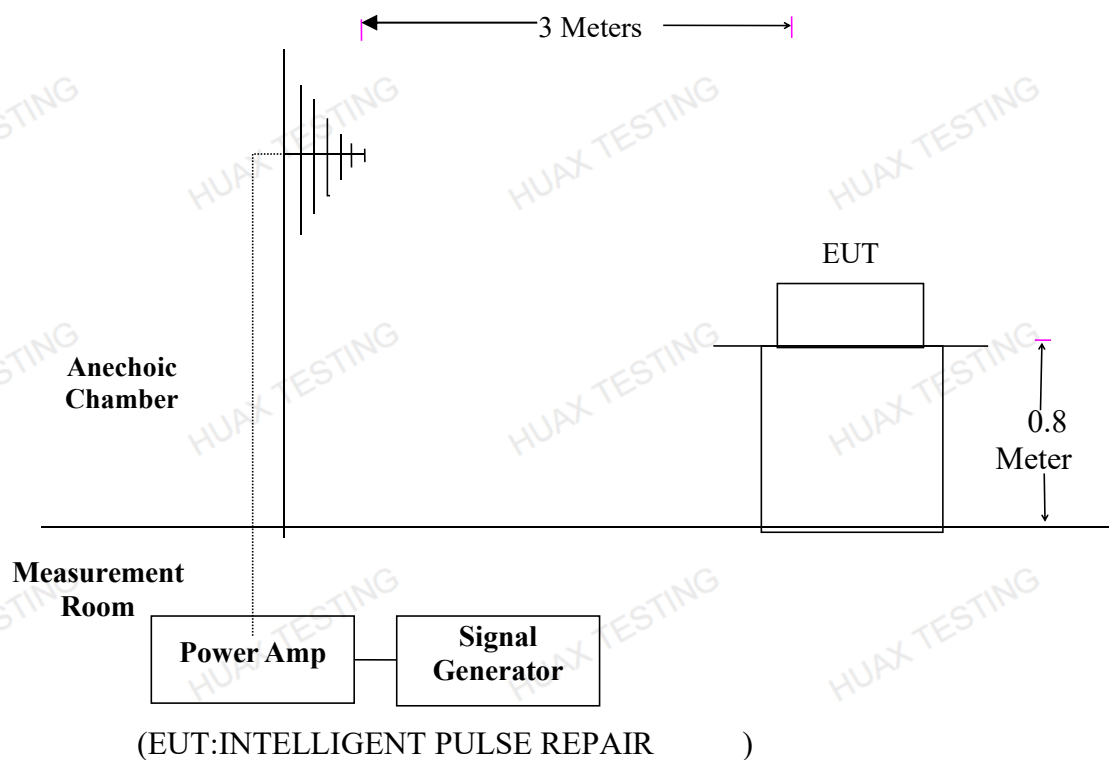

8.2 Test Standard

(EN61000-4-3: 2006 (Severity Level: 2, 3V / m))

8.3 Severity Levels and Performance Criterion

8.3.1 Severity Levels

Level	Field Strength V/m
1.	1
2.	3
3.	10
X	Special

8.3.2 Performance Criterion : A

8.4 EUT Configuration on Test

The configuration of the EUT is same as Section 3.3.

8.5 Operating Condition of EUT

Same as radiated emission measurement which is listed in Section 3.4, except the test setup replaced as Section 8.1.

8.6 Test Procedure

The EUT are placed on a table which is 0.8 meter high above the ground. The EUT is set 3 meters away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of the EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD camera is used to monitor its screen. All the scanning conditions are as following:

Condition of Test	Remark
1. Fielded Strength	3V/m (Severity Level 2)
2. Radiated Signal	Modulated
3. Scanning Frequency	80-1000MHz
4. Sweep time of radiated	0.0015 Decade/s
5. Dwell Time	1 Sec.

8.7 Test Results

PASS.

Please refer to the following page.

RF Field Strength Susceptibility Test Results

Applicant	: Tianchang Jinjie Electronics Co., Ltd	Test Date	: 2025-04-24
EUT	: INTELLIGENT PULSE REPAIR	Temperature	: 22℃
M/N	: XJB1210-2	Humidity	: 50 %
Field Strength	: 3 V/m	Criterion	: A
Power Supply	: AC110-240V 50/60Hz	Test Mode	: Normal
Test Engineer:	Mark	Frequency Range:	80 MHz to1000 MHz

Modulation:	☐ None	☐ Pulse	☒ AM 1KHz	80%
	Frequency Rang 1: 80~ 1000MHz		Frequency Rang 2:	
Steps	1	/	%	# / %
	Horizontal	Vertical	Horizontal	Vertical
Front	PASS	PASS		
Right	PASS	PASS		
Rear	PASS	PASS		
Left	PASS	PASS		


Test Equipment :
1. Signal Generator : 2031 (MARCONI)
2. Power Amplifier : 500A100 & XJB1210-2/1000M1 (A&R)
3. Power Antenna : 3108 (EMCO) & AT1080 (A&R)
4. Field Monitor : FM2000 (A&R)

Note:


9. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

9.1 Block Diagram of Test Setup

9.1.1. Block Diagram of the EUT



9.1.2. EFT Test Setup

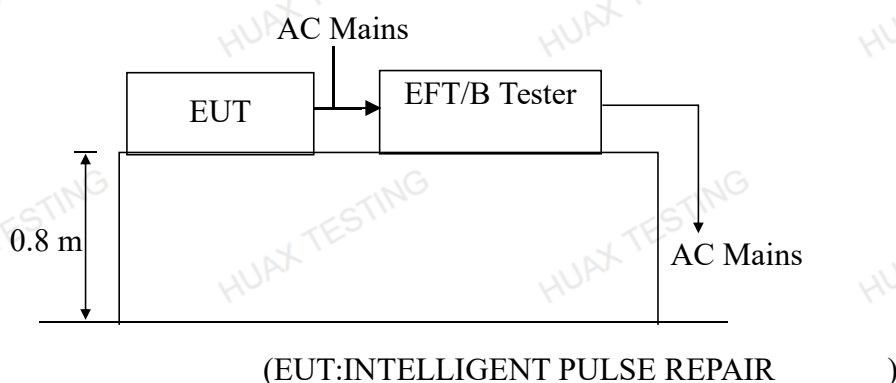

9.2 Test Standard

(EN61000-4-4:2004+A1:2010, Severity Level, Level 2: 1KV)

9.3 Severity Levels and Performance Criterion

9.3.1 Severity level

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On INTELLIGENT PULSE REPAIR Lines	On I/O (Input/Output) Signal data and control lines
1.	0.5 KV	0.25 KV
2.	1 KV	0.5 KV
3.	2 KV	1 KV
4.	4 KV	2 KV
X	Special	Special

9.3.2 Performance criterion : B

9.4 EUT Configuration

The configuration of EUT is listed in Section 3.3.

9.5 Operating Condition of EUT

9.5.1 Setup the EUT as shown in Section 9.1.

9.5.2 Turn on the power of all equipments.

9.5.3 Let the EUT work in test mode (Normal) and measure it.

9.6 Test Procedure

The EUT is put on the table which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

9.6.1 For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

9.6.2 For signal lines and control lines ports:

No I/O ports. It's unnecessary to test.

9.6.3 For DC output line ports:

It's unnecessary to test.

9.7 Test Result

PASS

Please reference to the following page


Electrical Fast Transient/Burst Test Results

Standard	☒ IEC 61000-4-4 ☒ EN 61000-4-4		Result : ☒ PASS / ☐ FAIL	
Applicant : Tianchang Jinjie Electronics Co., Ltd EUT : <u>INTELLIGENT PULSE REPAIR</u> M/N : <u>XJB1210-2</u> Input Voltage: <u>AC110-240V 50/60Hz</u> Criterion : B Ambient Condition : 20 °C 50% RH				
Operation Mode : Normal				
Line : ☒ AC Mains		Line : ☒ Signal line ☒ DC line		
Coupling : ☒ Direct		Coupling : ☒ Capacitive		
Test Time : 120s				
Line	Test Voltage	Result(+)	Result(-)	
L	1KV	PASS	PASS	
N	1KV	PASS	PASS	
L、N	1KV	PASS	PASS	
Note:				
Test Equipment		Burst Tester Model : PEFT 4010		

10. SURGE IMMUNITY TEST


10.1 Block Diagram of Test Setup

10.1.1 Block Diagram of the EUT



(EUT:INTELLIGENT PULSE REPAIR)

10.1.2. Surge Test Setup

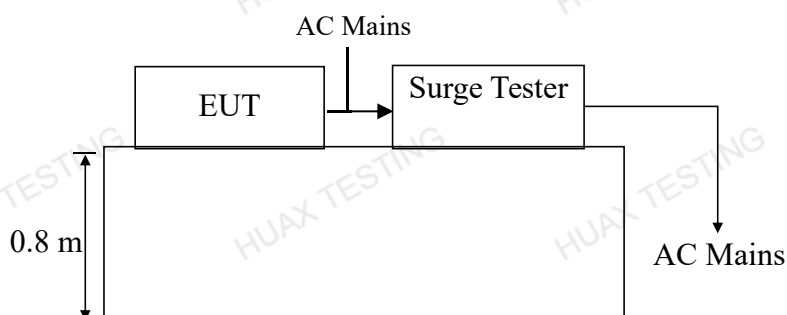

(EUT:INTELLIGENT PULSE REPAIR)

10.2 Test Standard

(EN61000-4-5: 2006)

Severity Level: Line to Line: Level 2, 1.0KV

10.3 Severity Levels and Performance Criterion

10.3.1. Severity level

Severity Level	Open-Circuit Test Voltage KV
1	0.5
2	1.0
3	2.0
4	4.0
*	Special

10.3.2 Performance criterion: **B**

10.4 EUT Configuration

The configuration of EUT is listed in Section 3.3.

10.5 Operating Condition of EUT

10.5.1 Setup the EUT as shown in Section 10.1.

10.5.2. Turn on the power of all equipments.

10.5.3. Let the EUT work in test mode (Normal) and measure it.

10.6 Test Procedure

- 1) Set up the EUT and test generator as shown on Section 10.1.2.
- 2) For line to line coupling mode, provide a 1.0 KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.
- 3) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 4) Different phase angles are done individually.
- 5) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

10.7 Test Result

PASS

Please reference to the following page


11. INJECTED CURRENTS SUSCEPTIBILITY TEST

11.1 Block Diagram of Test Setup

11.1.1 Block Diagram of the EUT



11.1.2 Block Diagram of Test Setup

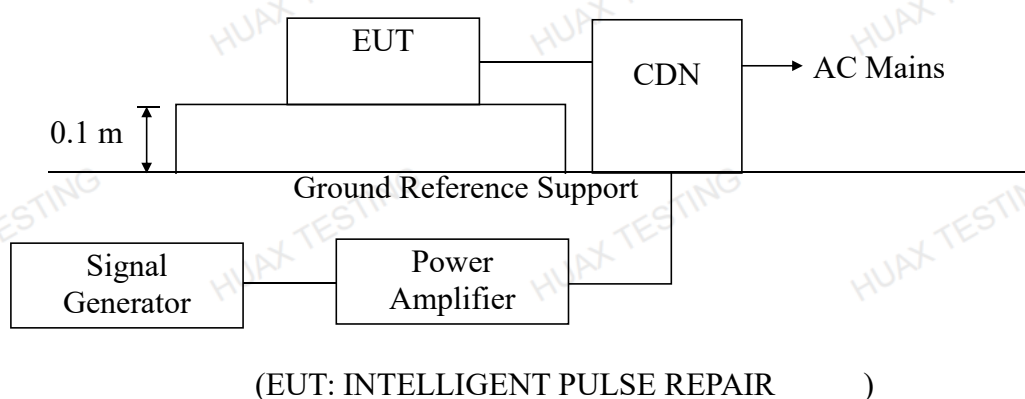

11.2 Test Standard

(EN61000-4-6: 2009, Severity Level: Level 2, 3V (rms), (0.15MHz ~ 80MHz)

11.3 Severity Levels and Performance Criterion

11.3.1 Severity level

Level	Field Strength V
1	1
2	3
3	10
X	Special

11.3.2 Performance criterion: A

11.4 EUT Configuration

The configuration of EUT is listed in Section 3.3.

11.5 Operating Condition of EUT

11.5.1 Setup the EUT as shown in Section 11.1.

11.5.2 Turn on the power of all equipments.

11.5.3 Let the EUT work in test mode (Normal) and measure it.

11.6 Test Procedure

- 1) Set up the EUT, CDN and test generators as shown on Section 11.1.2.
- 2) Let the EUT work in test mode and measure it.
- 3) The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 4) The disturbance signal described below is injected to EUT through CDN.
- 5) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 6) The frequency range is swept from 150KHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave.
- 7) The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 8) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

11.7 Test Results

PASS

Please reference to the following page


Injected Currents Susceptibility Test Results

Applicant : <u>Tianchang Jinjie Electronics Co., Ltd</u>			Test Date: <u>2025-04-24</u>	
EUT : <u>INTELLIGENT PULSE REPAIR</u>			Temperature : <u>22℃</u>	
M/N : <u>XJB1210-2</u>			Humidity : <u>58%</u>	
Power Supply : <u>AC110-240V 50/60Hz</u>				
Test Engineer : <u>Mark</u>				
Test Mode : <u>Normal</u>				
Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Criterion	Result
0.15 ~ 80	AC Mains	3V	A	PASS
Test Mode : _____				
Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Criterion	Result
Remark : 1. Modulation Signal:1KHz 80% AM Measurement Equipment : Simulator: CWS 500 (SWITZERLAND EMTEST) CDN : ☼CDN-M2 (SWITZERLAND EMTEST) ☼CDN-M3 (SWITZERLAND EMTEST)		Note:		

12. MAGNETIC FIELD SUSCEPTIBILITY TEST


12.1 Block Diagram of Test

12.1.1 Block diagram of test setup



(EUT: INTELLIGENT PULSE REPAIR)

12.1.2 Magnetic field test setup

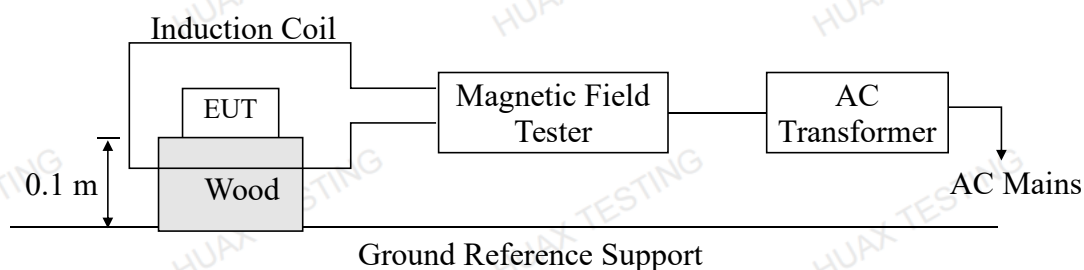

(EUT: INTELLIGENT PULSE REPAIR)

12.2 Test Standard

(EN61000-4-8: 2010, Severity Level: Level 1, 1A / m)

12.3 Severity Levels and Performance Criterion

12.3.1 Severity Levels

Level	Field Strength A/m
1	1
2	3
3	10
4	30
5	100
X	Special

12.3.2 Performance Criterion: A

12.4 EUT Configuration on Test

The configuration of the EUT is same as Section 3.3.

12.5 Test Procedure

The EUT is placed in the middle of a induction coil (1*1m), under which is a 1*1*0.1m (high) table, this small table is also placed on a larger table, 0.8 m above the ground. Both horizontal and vertical polarization of the induction coil are set on test, so that each side of the EUT is affected by the magnetic field. Also can reach the same aim by change the position of the EUT.

12.6 Test Results

PASS

Please reference to the following page

Magnetic Field Immunity Test Result

Standard	☒ IEC 61000-4-8 ☐ EN 61000-4-8		Result: ☐ Pass / ☒ Fail	
Applicant : Tianchang Jinjie Electronics Co., Ltd EUT : INTELLIGENT PULSE M/N: XJB1210-2 REPAIR Input Voltage : AC110-240V 50/60Hz Date of Test : 2025-04-24 Test Engineer: Mark Ambient Condition : Temp : 22°C Humid: 58% Criterion: A				
Operation Mode : Normal				
Test Level (A/M)	Testing Duration	Coil Orientation	Criterion	Result
1	5 mins	X	A	PASS
1	5 mins	Y	A	PASS
1	5 mins	Z	A	PASS
Operation Mode :				
Test Level (A/M)	Testing Duration	Coil Orientation	Criterion	Result
Test Equipment	Magnetic Field Test: HEAFELY MAG 100.1			
Note:				


13. VOLTAGE DIPS AND INTERRUPTIONS TEST

13.1 Block Diagram of Test Setup

13.1.1 Block Diagram of the EUT



13.1.2 Dips Test Setup

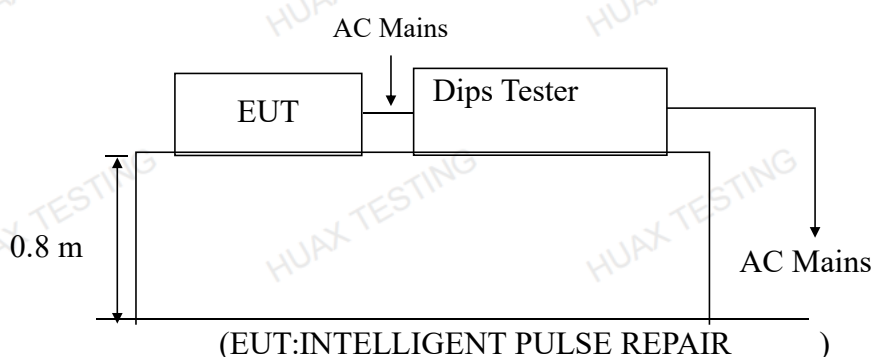

13.2 Test Standard

(EN61000-4-11: 2004)

13.3 Severity Levels and Performance Criterion

13.3.1 Severity level

Test Level %UT	Voltage dip and short interruptions %UT	Duration (in period)
0	100	0.5
40	60	1
		5
		10
70	30	25
		50
		*

13.3.2 Performance criterion : **B&C**

13.4 EUT Configuration

The configuration of EUT is listed in Section 3.3.

13.5 Operating Condition of EUT

13.5.1 Setup the EUT as shown in Section 13.1.

13.5.2 Turn on the power of all equipments.

13.5.3 Let the EUT work in test mode (Normal) and measure it.

13.6 Test Procedure

- 1) Set up the EUT and test generator as shown on Section 13.1.2.
- 2) The interruptions is introduced at selected phase angles with specified duration.
- 3) Record any degradation of performance.

13.7 Test Result

PASS

Please reference to the following page

Voltage Dips And Interruptions Test Results

Applicant : <u>Tianchang Jinjie Electronics Co., Ltd</u>			Test Date : <u>2025-04-24</u>	
EUT : <u>INTELLIGENT PULSE REPAIR</u>			Temperature : <u>22°C</u>	
M/N : <u>XJB1210-2</u>			Humidity : <u>50%</u>	
Power Supply : <u>AC110-240V 50/60Hz</u>			Test Engineer : <u>Mark</u>	
Test Mode: <u>Normal</u>				
Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in periods)	Criterion ☐ A ☒ B ☒ C ☐ D	Result P=PASS F=Fail
0	100	0.5P	B	P
40	60	250P	C	P
70	30	25P	C	P
Test Mode :				
Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in periods)	Criterion ☐ A ☐ B ☐ C ☐ D	Result P=PASS F=FAIL
Note:				

FIGURE
GENERAL APPEARANCE OF EUT

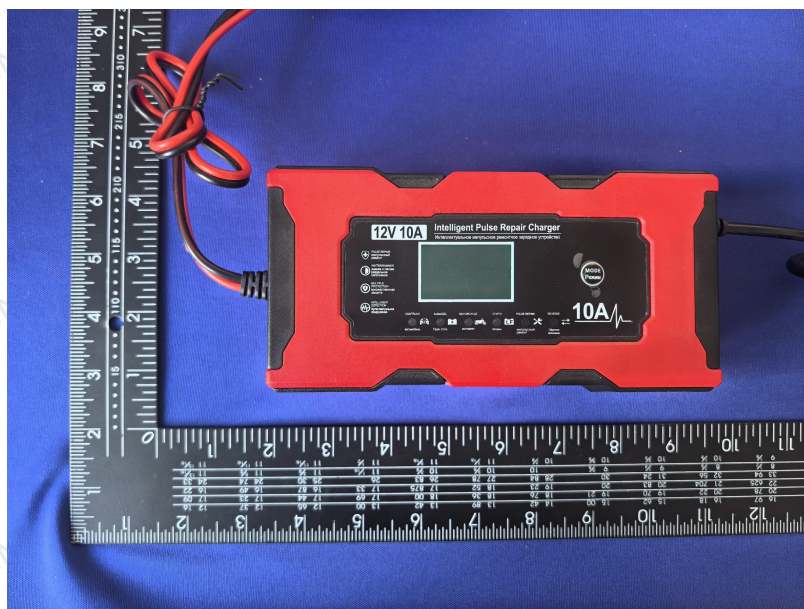


Figure-1



Figure-2

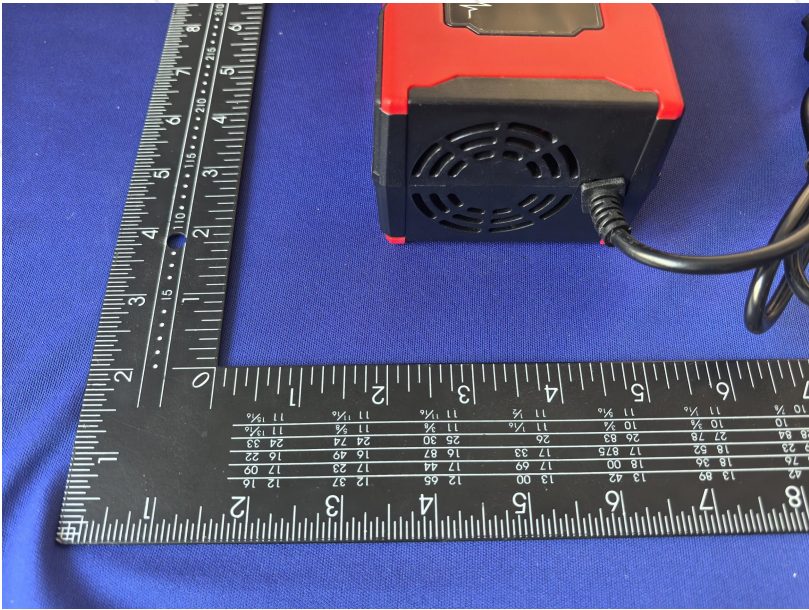


Figure-3

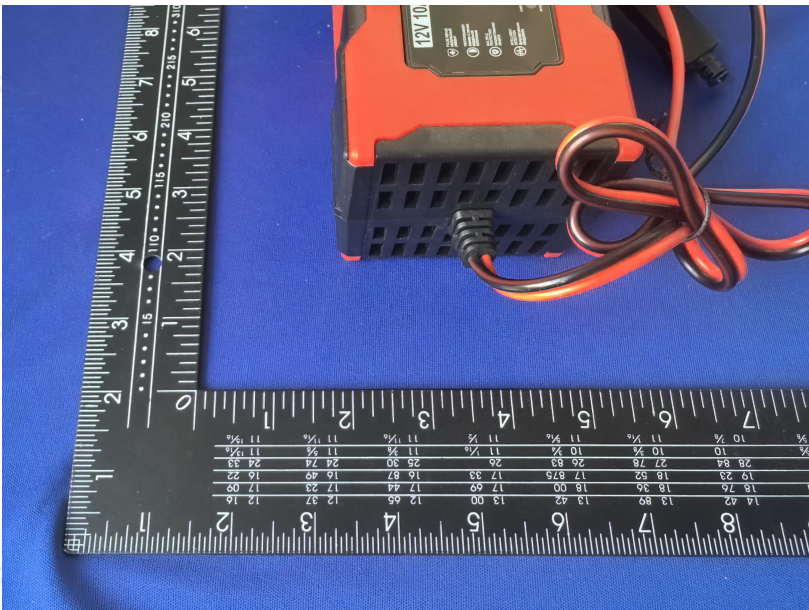


Figure-4

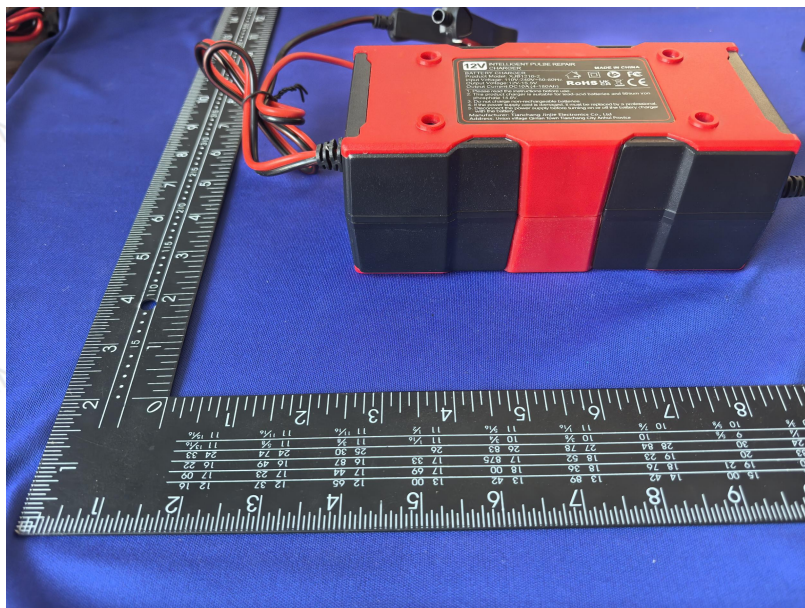


Figure-5

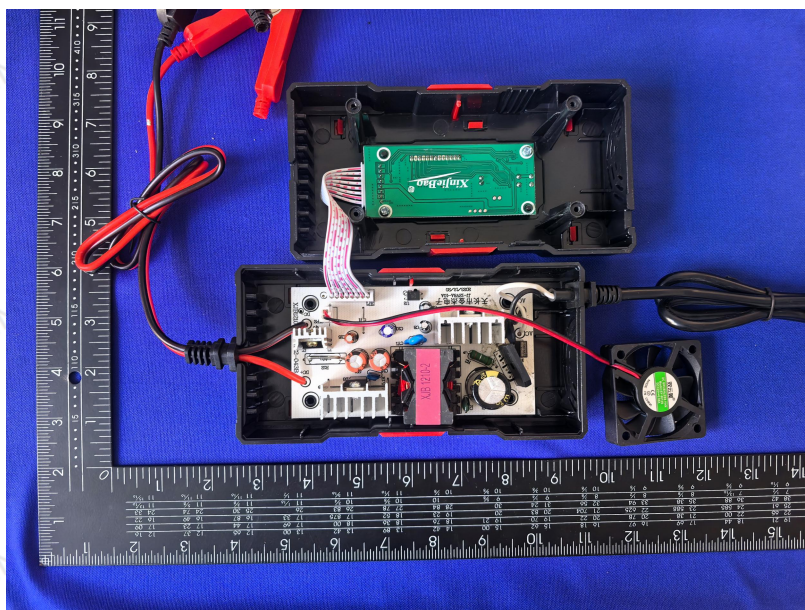


Figure-6

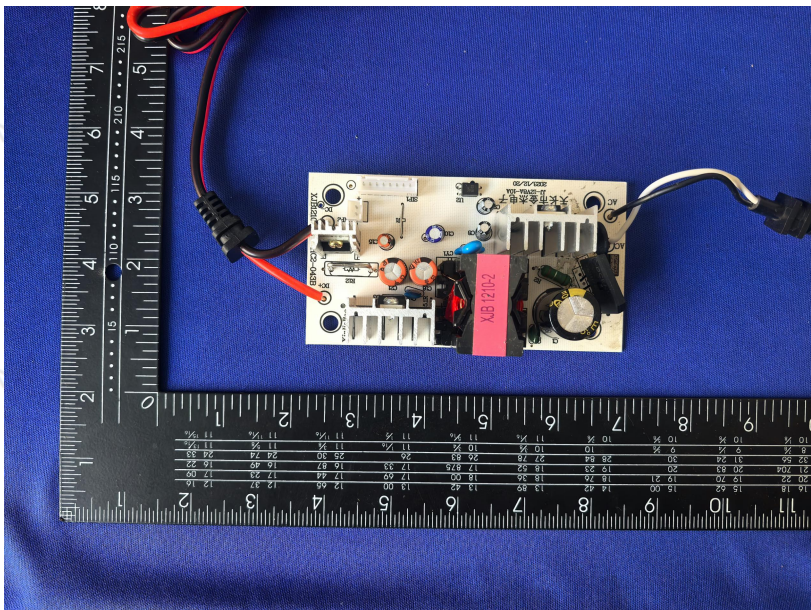


Figure-7

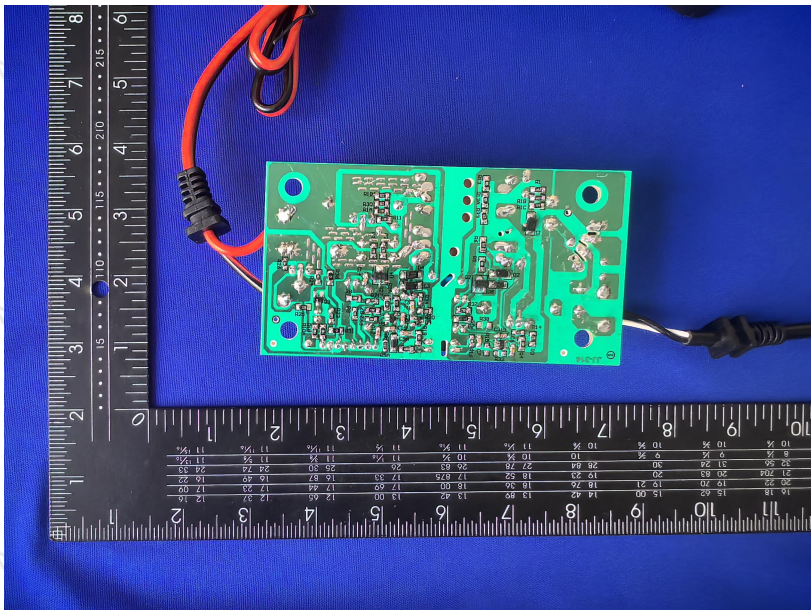


Figure-8

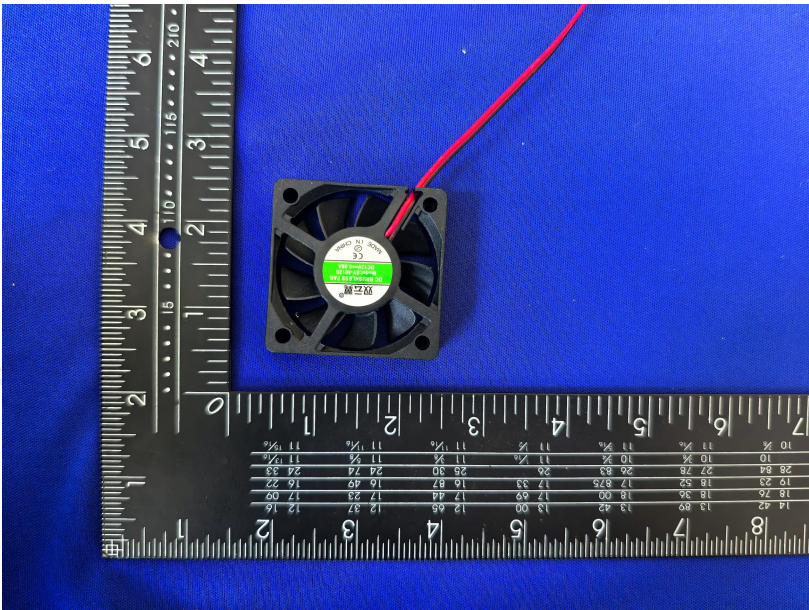


Figure-9

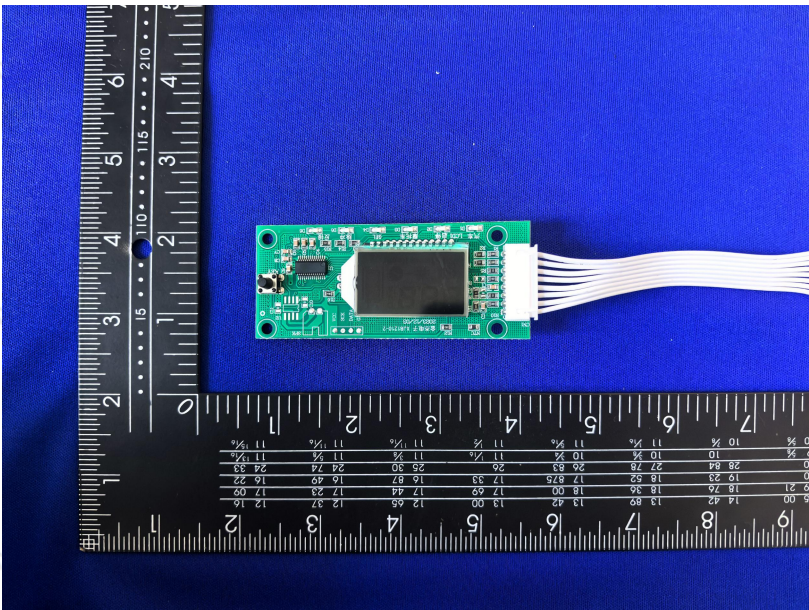


Figure-10

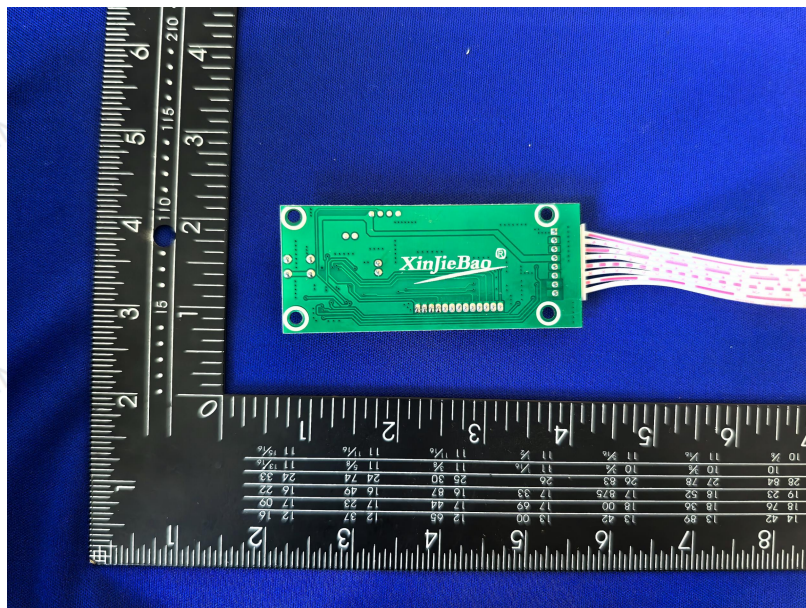


Figure-11

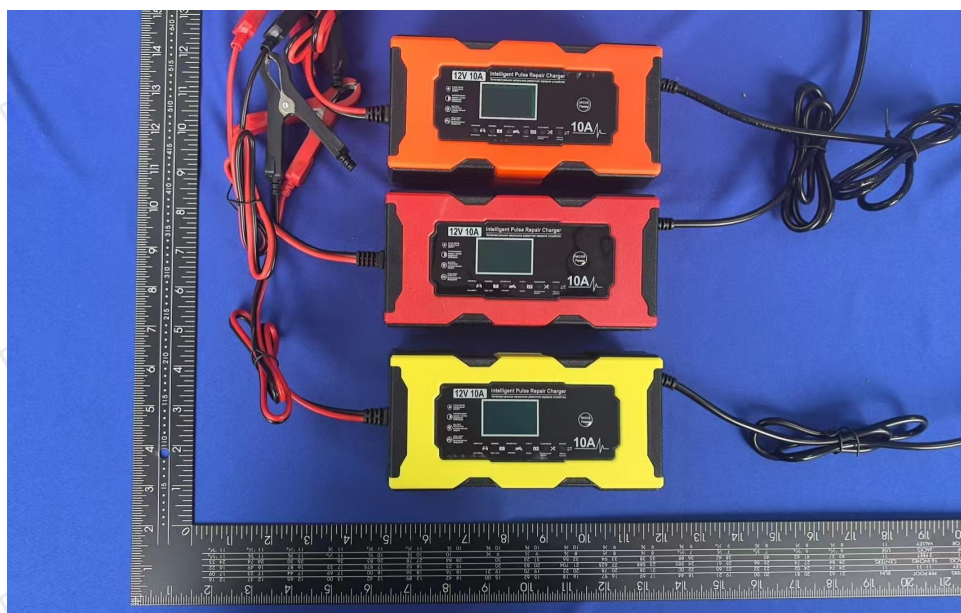


Figure-12

*****THE END*****